

KERF DOOR FRAME SPECIFICATIONS

THREE HINGE FRAME

DOOR INFORMATION:

Net Height: _____ Net Width: _____

Manufacturer: _____

Frame Ordering Information:

(Available for 1 3/4" doors only)

1. FRAME WIDTH NET _____

(For double doors, specify 5/8" or "Z" astragal)

2. FRAME HEIGHT NET _____

3. WALL THICKNESS Circle one

4 1/2" - 5 1/2" 5 1/2" - 6 1/2" 8 1/2" - 9 1/2"

6 1/2" - 7 1/2" 7 1/2" - 8 1/2" 9 1/2" - 10 1/2"

4. HINGE PREP (Check one)

4" Non-Template 5/8" Radius

4" Template-Timely 1/4" Radius

4 1/2" Template-Timely Square Corner

5. STRIKE OPTIONS

a. 2- 3/4" T Strike _____

b. 2-1/4" D-Strike (Full Lip) _____

c. Deadbolt Strike #1 (cnt to cnt) _____



d. Deadbolt Strike #2 (cnt to cnt) _____

e. 4- 7/8" ASA Strike _____

6. FIRE RATING (90 Minutes Only)

7. FINISH (Prime Bright White Only)

8. HANDING



9. THRESHOLD PREP

• Standard

Check one



THRESHOLD TYPE	* CLEARANCE	ACTUAL SILL HEIGHT
Inswing	3/8"	1 1/4"
ADA/Bumper Outswing	5/16"	1/2"


* Clearance based on use of a .520 thick 4 fin sweep.

• Custom


Sill Manufacturer _____

Clearance _____

Sill Height _____




ALL FRAME DIMENSIONS MUST BE FILLED OUT TO PROCESS ORDER

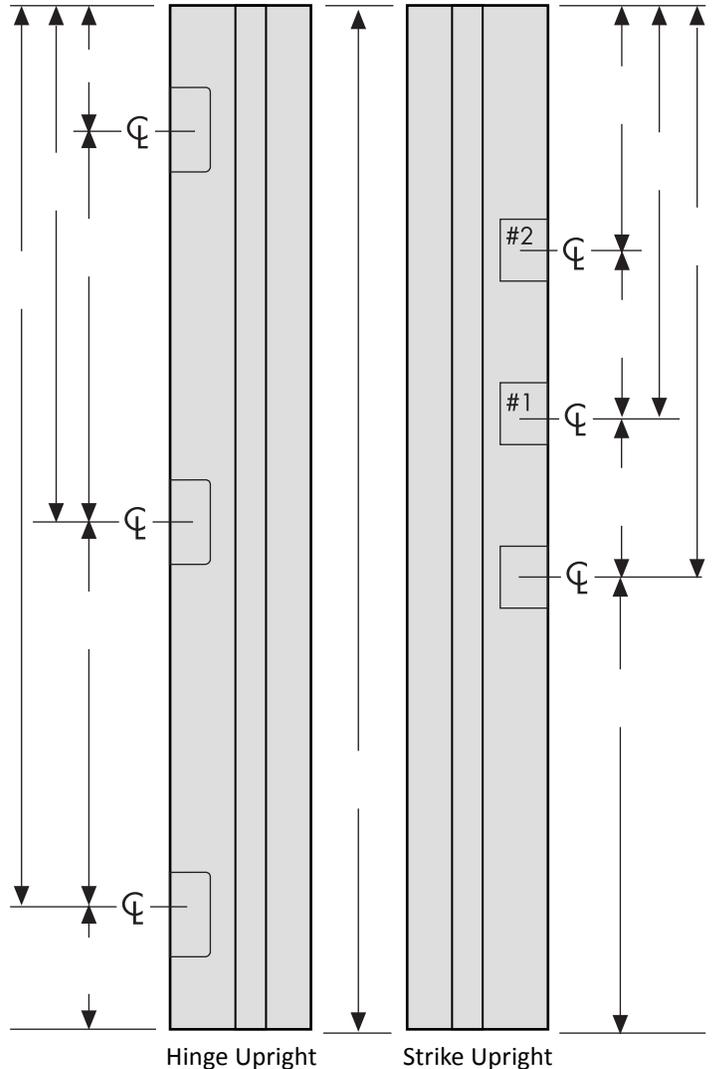


Diagrams represent recommended clearances or provide your requirements.

Strike Jamb Detail 5/32"



Hinge Jamb and Header Detail

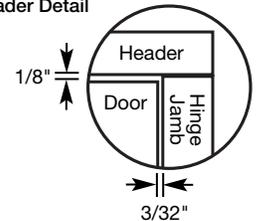

Spec written and approved by: _____

Company: _____

KERF DOOR FRAME SPECIFICATIONS

FOUR HINGE FRAME

DOOR INFORMATION:

Net Height: _____ Net Width: _____

Manufacturer: _____

Frame Ordering Information:

(Available for 1 3/4" doors only)

1. FRAME WIDTH NET _____

(For double doors, specify 5/8" or "Z" astragal)

2. FRAME HEIGHT NET _____

3. WALL THICKNESS Circle one

4 1/2" - 5 1/2" 5 1/2" - 6 1/2" 8 1/2" - 9 1/2"
 6 1/2" - 7 1/2" 7 1/2" - 8 1/2" 9 1/2" - 10 1/2"

4. HINGE PREP (Check one)

4" Non-Template 5/8" Radius
 4" Template-Timely 1/4" Radius
 4 1/2" Template-Timely Square Corner


5. STRIKE OPTIONS

a. 2- 3/4" T Strike _____
 b. 2-1/4" D-Strike (Full Lip) _____
 c. Deadbolt Strike #1 (cnt to cnt) _____
 d. Deadbolt Strike #2 (cnt to cnt) _____
 e. 4- 7/8" ASA Strike _____

6. FIRE RATING (90 Minutes Only)

7. FINISH (Prime Bright White Only)

8. HANDING



9. THRESHOLD PREP

• Standard


Check one

THRESHOLD TYPE	* CLEARANCE	ACTUAL SILL HEIGHT
<input type="checkbox"/> Inswing	3/8"	1 1/4"
<input type="checkbox"/> ADA/Bumper Outswing	5/16"	1/2"


* Clearance based on use of a .520 thick 4 fin sweep.

• Custom

Sill Manufacturer _____
 Clearance _____
 Sill Height _____




ALL FRAME DIMENSIONS MUST BE FILLED OUT TO PROCESS ORDER

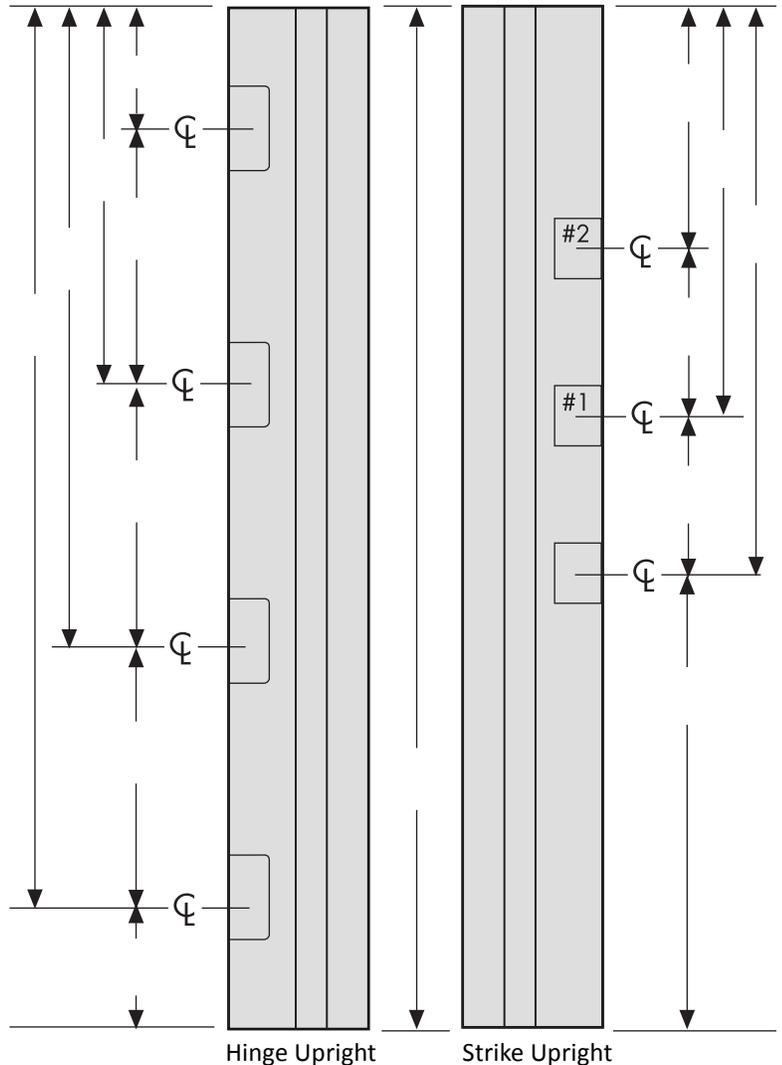


Diagrams represent recommended clearances or provide your requirements.

Strike Jamb Detail 5/32"



Hinge Jamb and Header Detail

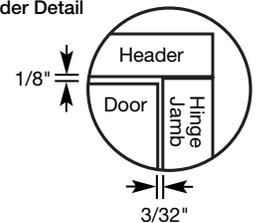

Spec written and approved by: _____

Company: _____